



PARK AVENUE VINYL

Specification Sheet

STANDARD 1" FLAT VINYL EDGE

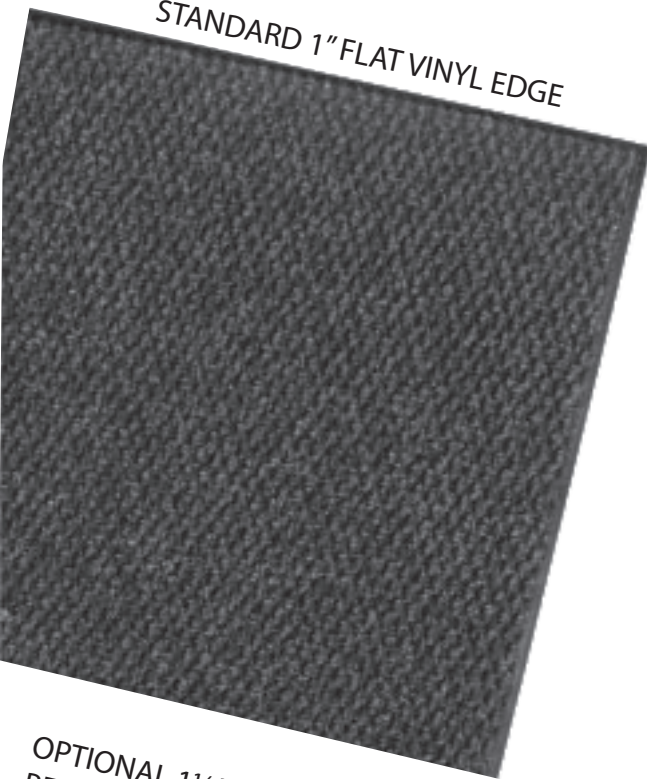


OPTIONAL 1½" HEAVY DUTY SAFETY
BEVELED EDGE WITH MITRED CORNERS

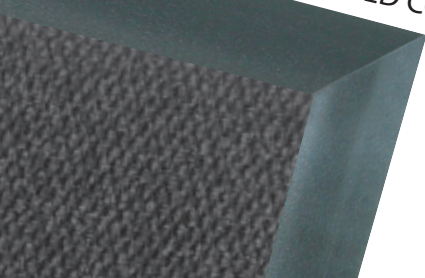


Application –	Indoor and outdoor.
Construction –	“Never-Fray” needlepunch construction. Includes 1/4" vinyl border.
Texture –	Hobnail non-directional pattern.
Face Fiber –	100% Solution dyed UV stabilized polypropylene for maximum stain and fade resistance.
Face Weight –	37 oz/sq yd is 50% heavier than the average rental runner resulting in more water retention, durability, crush resistance, and aggressive soil removal.
Total Weight –	1.1 lb per square foot.
Total Height –	(.4) inches (variable).
Backing –	Vinyl. (Optional Velcro strips available for use on carpet.)
Sizing –	3', 4' or 6' wide x up to 60' long. (Can be cut to narrower widths.)
Flammability –	Passed (DOC-FF-1-70) Pill test.
Water Retention –	(.57) gallons per square yard. Outperforms matting whose claim to fame is water retention.
3-Year Warranty –	100% in first year, 50% in second year, 25% in third year.
Installation –	Easy to self-install with a mat knife. Optional on site installation by a PROFORM certified master installer is available.
Storage Cores –	Optional Heavy Duty fiber storage cores insure that matting is ready to lay flat without curling. (Always store carpet side out.)
Edging –	Vinyl Border: 1/4in extension of the backing beyond the base fiber.
Cleaning –	Regular vacuuming, carpet extraction or bonnet cleaning as needed.

LEED: Possible LEED-NC credits: MR Credit 4 (1-2 points), IEQ Credit 4.1 (1 point)

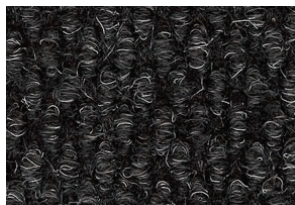


#1 ONYX

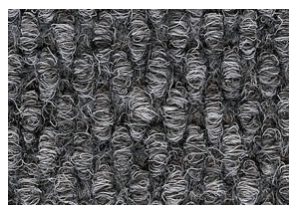

#13 METALLIC



#18 BRICK



#35 WALNUT

Because you never get a second chance to make a first impression.

888.331.3100 • www.proformmat.com